



Teleskopschiene HG58Ü

Basistyp:

- Seitenmontage
- Überauszug
- Stahl verzinkt
- Befestigungsbohrungen

Sonderanfertigungen:

- Sonderlängen
- Bohrungen / Lochabstände
- Anbauelemente
- Kombinationen

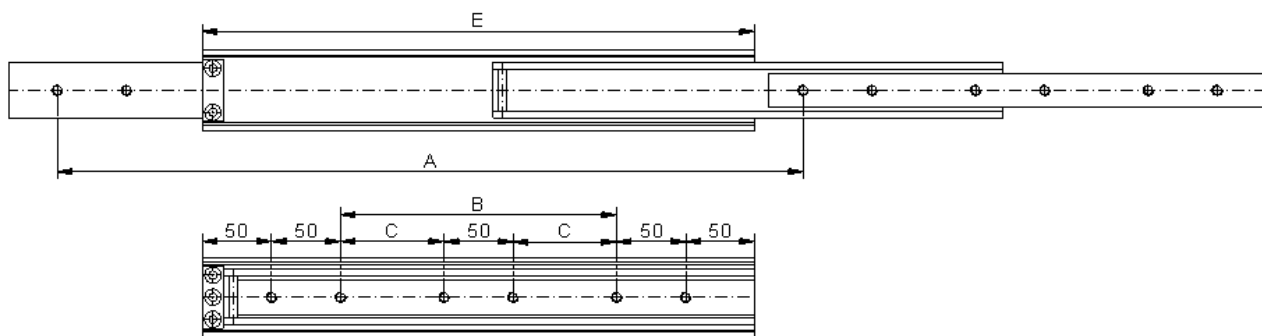

Einbaulänge	Länge				Lochbild		Gewicht	Auszugslänge	Belastung/Pair
	2	3	B	C	1	3			
E	2	3	B	C	1	3	Kg	A	Kg
300	285	275	100		4	4	2,60	450	100
350	335	325	150		4	4	3,10	525	105
400	385	375	200		4	4	3,50	600	110
450	435	425	250		4	4	3,95	675	105
500	485	475	300		4	4	4,40	750	100
550	535	525		150	6	6	4,80	825	95
600	585	575		175	6	6	5,25	900	90
650	635	625		200	6	6	5,70	975	85
700	685	675		225	6	6	6,10	1050	80
750	735	725		250	6	6	6,60	1125	72
800	785	775		275	6	6	7,00	1200	65
850	835	825		300	6	6	7,45	1275	58
900	885	875		325	6	6	7,90	1350	50
950	935	925		350	6	6	8,30	1425	40
1000	985	975		375	6	6	8,75	1500	30