



Teleskopschiene HG75

Basistyp:

- Seitenmontage
- Vollauszug
- Stahl verzinkt
- Befestigungsbohrungen

Sonderanfertigungen:

- Sonderlängen
- Bohrungen / Lochabstände
- Anbauelemente
- Kombinationen

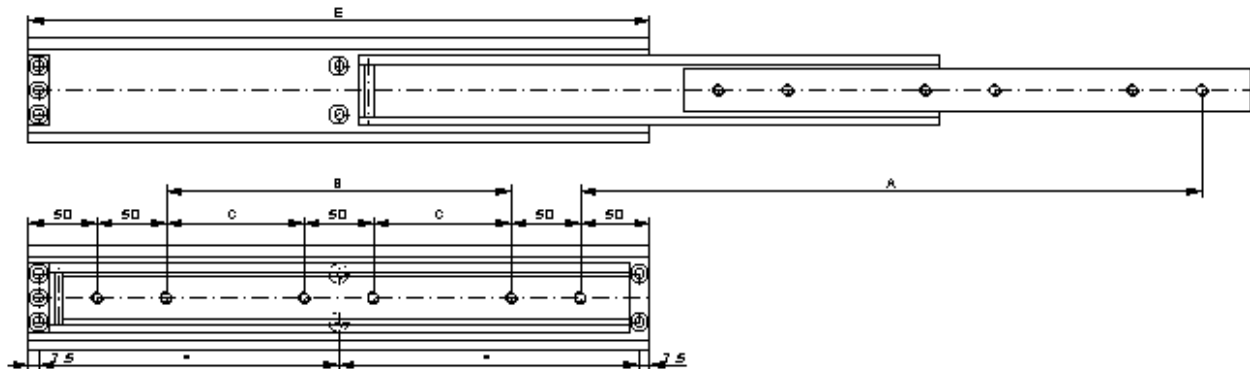

Einbaulänge	Länge				Lochbild		Gewicht	Auszugslänge	Belastung/Pair
	2	3	B	C	1	3			
E							Kg	A	Kg
300	270	260	100		4	4	2,75	300	320
350	320	310	150		4	4	3,25	350	325
400	370	360	200		4	4	3,72	400	330
450	420	410	250		4	4	4,18	450	325
500	470	460	300		4	4	4,65	500	320
550	520	510		150	6	6	5,11	550	315
600	570	560		175	6	6	5,58	600	310
650	620	610		200	6	6	6,04	650	305
700	670	660		225	6	6	6,51	700	300
750	720	710		250	6	6	6,97	750	295
800	770	760		275	6	6	7,44	800	290
850	820	810		300	6	6	7,90	850	285
900	870	860		325	6	6	8,37	900	280
950	920	910		350	6	6	8,83	950	275
1000	970	960		375	6	6	9,30	1000	270



Teleskopschiene HG75

Basistyp:

- Seitenmontage
- Vollauszug
- Stahl verzinkt
- Befestigungsbohrungen

Sonderanfertigungen:

- Sonderlängen
- Bohrungen / Lochabstände
- Anbauelemente
- Kombinationen

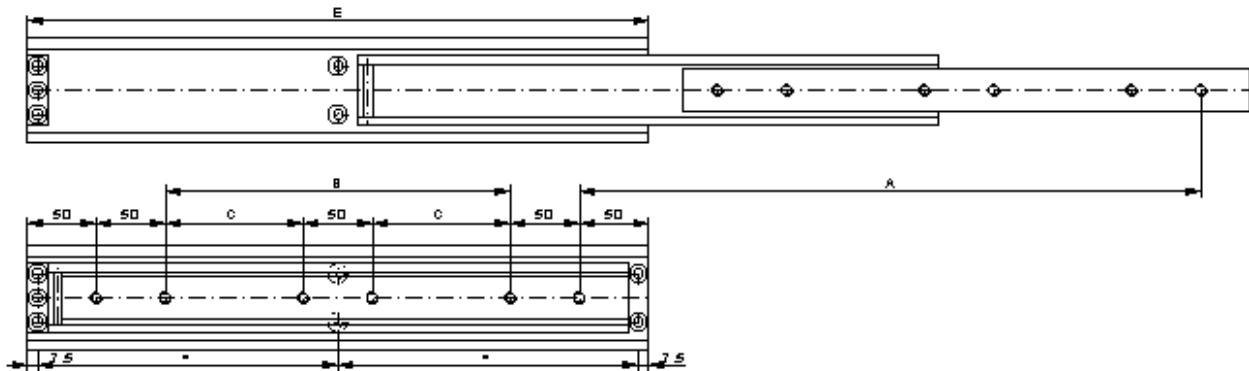

aulänge	Länge				Lochbild		Gewicht	Auszugslänge	Belastung/Paar
	2	3	B	C	1	3			
E	2	3	B	C	1	3	Kg	A	Kg
1100	1070	1060		425	6	6	10,23	1100	260
1200	1170	1160		475	6	6	11,16	1200	250
1300	1270	1260		525	6	6	12,09	1300	235
1400	1370	1360		575	6	6	13,02	1400	220
1500	1470	1460		625	6	6	13,95	1500	205
1600	1570	1560		675	6	6	14,88	1600	190
1700	1670	1660		725	6	6	15,81	1700	175
1800	1770	1760		775	6	6	16,74	1800	160
1900	1870	1860		825	6	6	17,67	1900	145
2000	1970	1960		875	6	6	18,60	2000	130
2100	2070	2060		925	6	6	19,53	2100	110
2200	2170	2160		975	6	6	20,46	2200	90
2300	2270	2260		1025	6	6	21,39	2300	70
2400	2370	2360		1075	6	6	22,34	2400	50