


Hegra Rail Datenblatt LTH30 RF



Schwerlastauszug

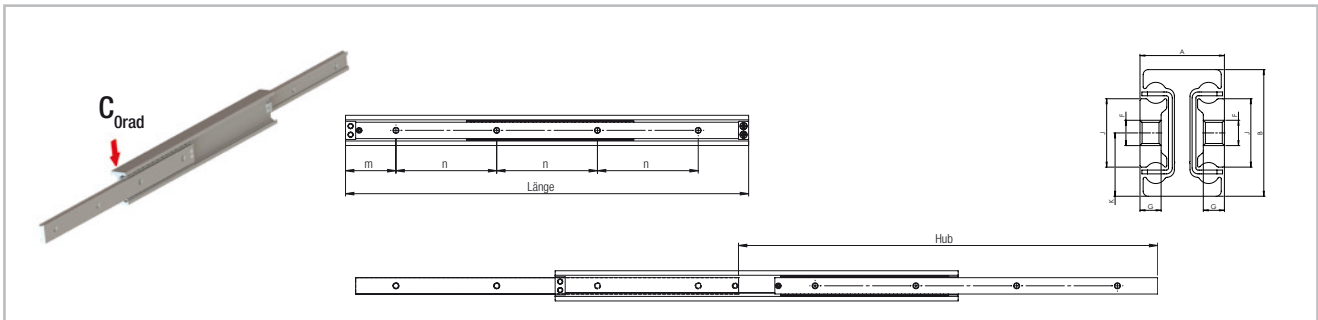

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		m [mm]	n [mm]	Anzahl Bohrungen
				C _{0rad} [N]	C _{0ax} [N]			
LTH	30	250	285	404	a. A.	25	100	3
		300	323	1008		50		
		350	377	1042		25		4
		400	416	1136		50		
		450	485	1164		25		5
		500	523	1470		50		
		550	577	1464		25		6
		600	615	1402		50		
		650	685	1230		25		7
		700	723	1186		50		
		750	777	1100		25		8
		800	815	1066		50		
		850	884	962		25		9
		900	923	936		50		
		950	977	882		25		10
		1000	1015	858		50		
1050	1084	792	25	11				
1100	1123	772	50					
1150	1176	736	25	12				
1200	1215	720	50					

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	Gewicht [kg/m]
LTH	30	20	30	16,2	5,0	15,0	M6	3,5