


Hegra Rail Datenblatt HTT030



Teilauszug

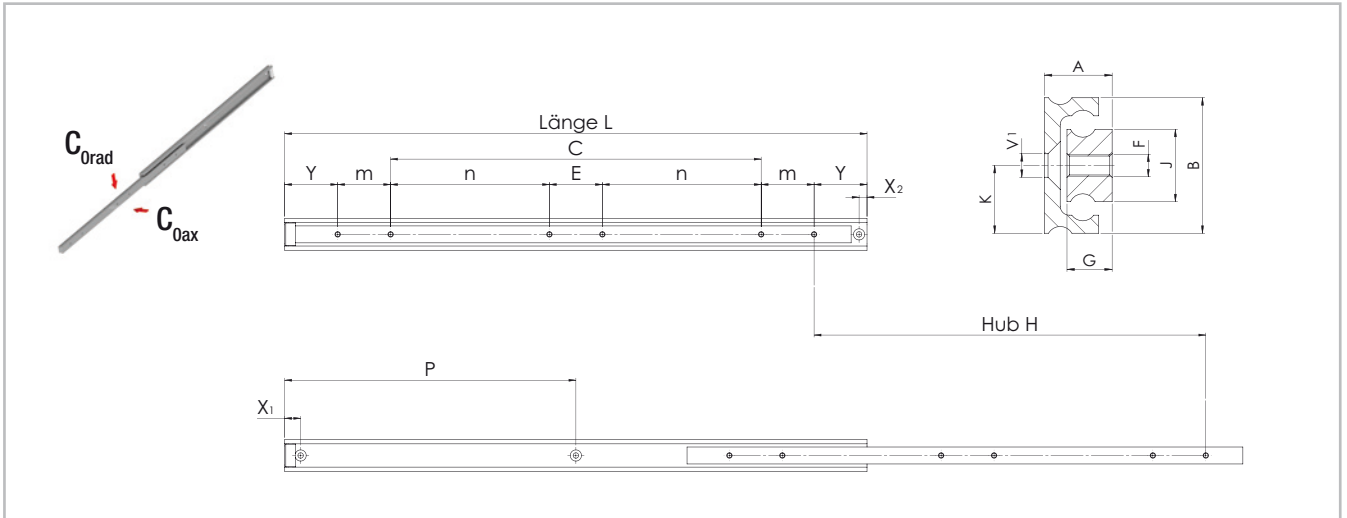

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen
				C_{0rad} [N]	C_{0ax} [N]									
HTT	30	250	130	1100	70 % C_{0rad}	15	7,5	50	50	-	-	50	125	4
		300	180	1200								100	150	
		350	230	1150								150	175	
		400	260	1100								200	200	
		450	310	1050								250	225	
		500	340	1000								300	250	
	550	370	950	150	275	6								
	600	400	900	175	300									
	650	430	850	200	325									
	700	460	800	225	350									
	750	490	750	250	375									
	800	520	700	275	400									
	850	550	650	300	425	50								
	900	600	600	325	450									
	950	630	550	350	475									
	1000	660	500	375	500									

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	V1	Gewicht [kg/m]
HTT	30	15	30	16	10	15	M6	M5	2,4