


Hegra Rail Datenblatt HTC026



Teilauszug

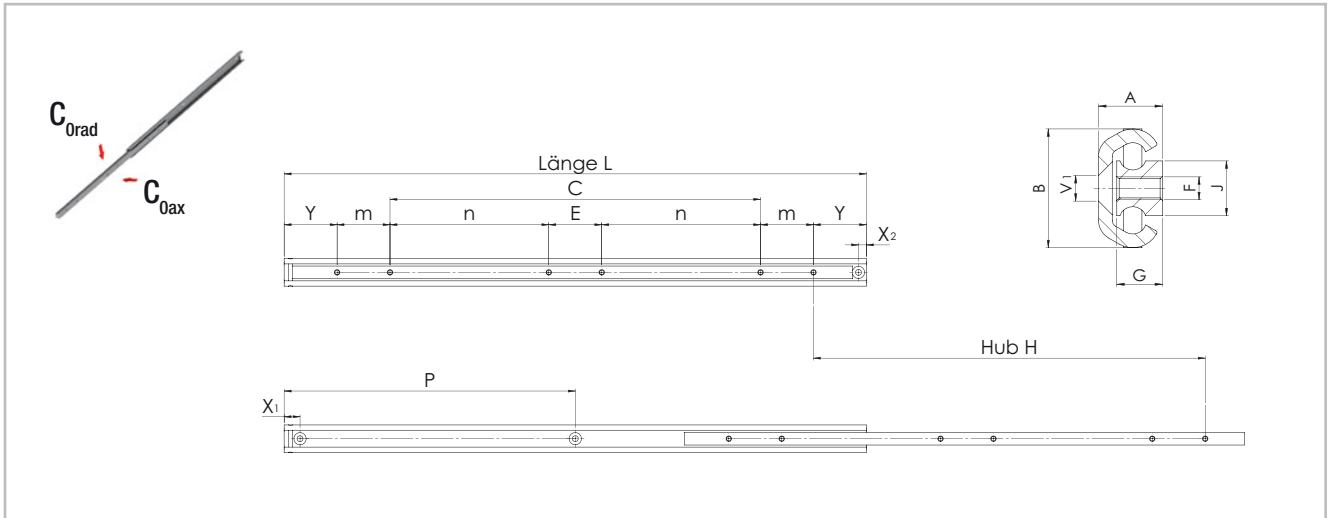

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen
				C_{Orad} [N]	C_{Oax} [N]									
HTC	26	250	130	700	60 % C_{Orad}	15	7,5	50	50	-	-	50	125	4
		300	180	750								100	150	
		350	230	750								150	175	
		400	260	700								200	200	
		450	310	650								250	225	
		500	340	600								300	250	
		550	370	550								150	275	6
		600	400	500								175	300	
		650	430	450								200	325	
		700	460	400								225	350	
		750	490	350								250	375	
		800	520	300								275	400	
		850	550	250								300	425	
		900	600	220								325	450	
		950	630	200								350	475	
		1000	660	180								375	500	

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	F	V1	Gewicht [kg/m]
HTT	26	14	26	12	10	M5	M5	1,81