


Hegra Rail Datenblatt HTC050



Teilauszug

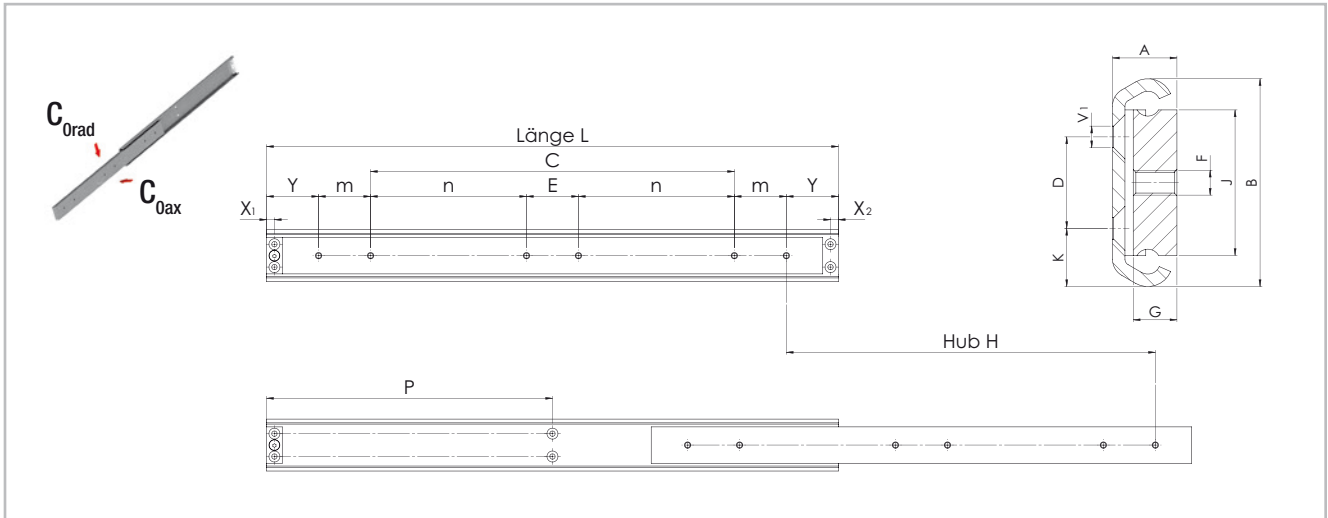

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen							
				C_{Orad} [N]	C_{Oax} [N]																
HTC	50	300	180	1500	60 % C_{Orad}	7,5	7,5	50	50	-	-	100	150	4							
		350	230	1600								150	175								
		400	260	1700								200	200								
		450	310	1800								250	225								
		500	340	1750								300	250	50	-	-	-	-	-	-	6
		550	370	1700								150	275								
		600	400	1650								175	300								
		650	430	1600								200	325								
		700	460	1550								225	350								
		750	490	1450								250	375								
		800	520	1350								275	400								
		850	550	1250								300	425								
		900	600	1150								325	450								
		950	630	1050								350	475								
		1000	660	950								375	500								
		1100	720	750								425	550								
1200	800	550	475	600																	

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HTC	50	15,5	50	35	10,5	14	22	M6	M5	3,80