


# Hegra Rail Datenblatt HTC058



## Teilauszug

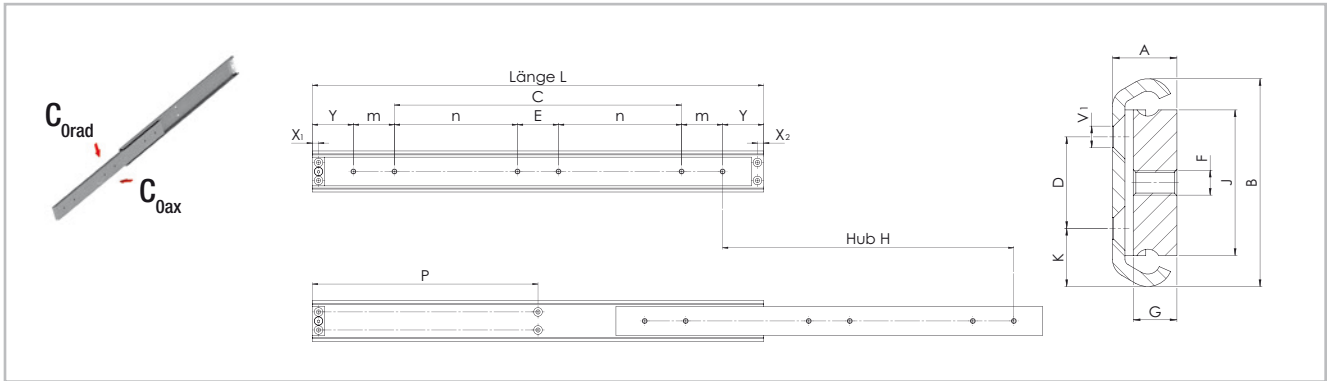

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen		
				$C_{0rad}$ [N]	$C_{0ax}$ [N]											
HTC	58	300	180	2200	60 % $C_{0rad}$	7,5	7,5	50	50			100	150	4		
		350	230	2300								150	175			
		400	260	2400								-	-		200	200
		450	310	2500								250	225			
		500	340	2450								300	250			
		550	370	2400								150	275	6		
		600	400	2350								175	300			
		650	430	2300								200	325			
		700	460	2200								225	350			
		750	490	2100								250	375			
		800	520	2000								275	400			
		850	550	1900								300	425			
		900	600	1800								325	450			
		950	630	1700								350	475			
		1000	660	1600								375	500			
		1100	720	1400								425	550			
		1200	800	1200								475	600			
		1300	860	1000								525	650			
1400	920	800	575	700												
1500	1000	600	625	750												

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HTC	58	17,5	58	40	12	13	32	M8	M6	7,10