


Hegra Rail Datenblatt HTC075



Teilauszug

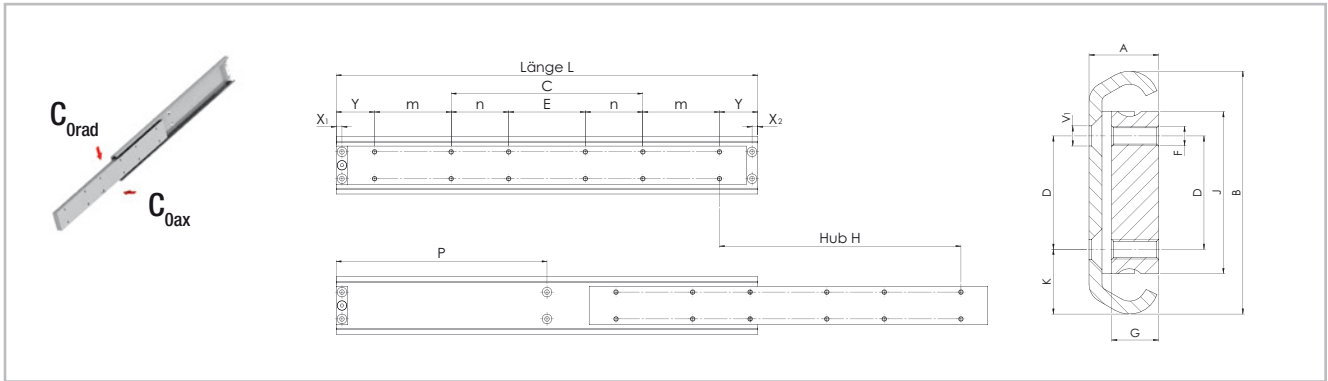

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen		
				C_{0rad} [N]	C_{0ax} [N]											
HTC	75	400	240	2800	60 % C_{0rad}	7,5	7,5	50	100			150	200	6		
		450	270	2850								-	-		175	225
		500	300	2900											200	250
		550	330	3000								75			275	12
		600	360	2950								100		300		
		650	390	2900								125		325		
		700	420	2850								150		350		
		750	450	2800								175		375		
		800	480	2750								200		400		
		850	510	2700								225		425		
		900	540	2650								250	100	-	450	
		950	570	2600								275		475		
		1000	600	2500								300		500		
		1100	660	2250								350		550		
		1200	720	2000								400		600		
		1300	780	1750								450		650		
		1400	840	1500								500		700		
		1500	900	1200								550		750		
1600	960	900	600		800											
1700	1020	700	650		850											

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HTC	75	21,5	75	50	14,5	20	35	M6	M6	8,80