


Hegra Rail Datenblatt HTT0100



Teilauszug

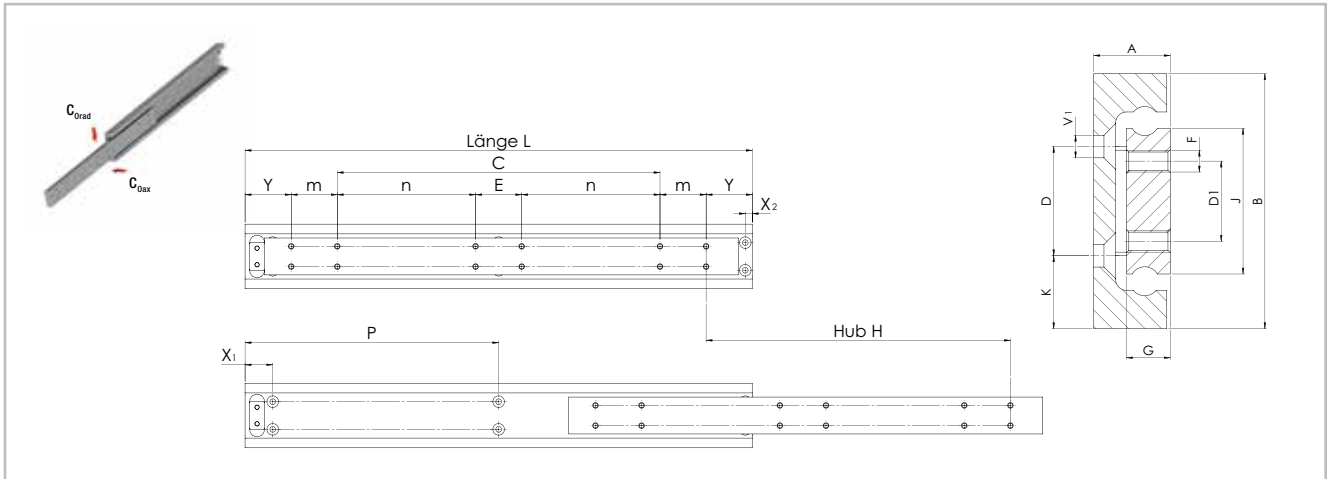

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen
				C_{Oax} [N]	C_{Orad} [N]									
HTT	100	700	420	9000	50 % C_{Orad}	35	12	100	200	-	-	100	350	8
		750	450	9500								150	375	
		800	480	10000								200	400	
		850	510	9750								250	425	
		900	540	9500								300	450	
		950	570	9250								350	475	
		1000	600	9000								400	500	
		1100	660	8500								150	550	
		1200	720	8000								200	600	
		1300	780	7500								250	650	
		1400	840	6900								300	700	
		1500	900	6300								350	750	
		1600	960	5700								400	800	
		1700	1020	5100								450	850	
		1800	1080	4500								500	900	
		1900	1140	3900								550	950	
		2000	1200	3300								600	1000	

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	D1	F	V1	Gewicht [kg/m]
HTT	100	26	100	70	15	27,5	45	45	M10	M8	17