


# Hegra Rail Datenblatt HTT030



## Teilauszug

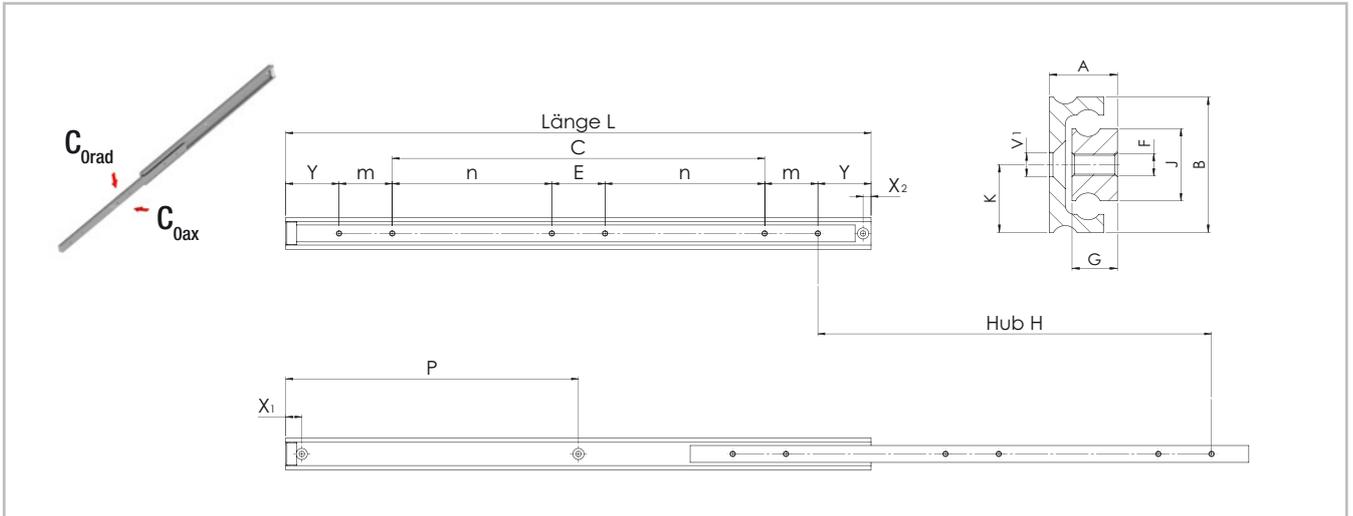

Alle Abmessungen sind in mm angegeben

| Typ | Bau-<br>größe | Länge<br>L<br>[mm] | Hub<br>H<br>[mm] | Tragzahl pro Paar |                    | X1 | X2  | Y  | m  | n | E | C   | P   | Anzahl<br>Bohrungen |
|-----|---------------|--------------------|------------------|-------------------|--------------------|----|-----|----|----|---|---|-----|-----|---------------------|
|     |               |                    |                  | $C_{0rad}$<br>[N] | $C_{0ax}$<br>[N]   |    |     |    |    |   |   |     |     |                     |
| HTT | 30            | 250                | 130              | 1100              | 70 %<br>$C_{0rad}$ | 15 | 7,5 | 50 | 50 | - | - | 50  | 125 | 4                   |
|     |               | 300                | 180              | 1200              |                    |    |     |    |    |   |   | 100 | 150 |                     |
|     |               | 350                | 230              | 1150              |                    |    |     |    |    |   |   | 150 | 175 |                     |
|     |               | 400                | 260              | 1100              |                    |    |     |    |    |   |   | 200 | 200 |                     |
|     |               | 450                | 310              | 1050              |                    |    |     |    |    |   |   | 250 | 225 |                     |
|     |               | 500                | 340              | 1000              |                    |    |     |    |    |   |   | 300 | 250 |                     |
|     |               | 550                | 370              | 950               |                    |    |     |    |    |   |   | 150 | 275 | 6                   |
|     |               | 600                | 400              | 900               |                    |    |     |    |    |   |   | 175 | 300 |                     |
|     |               | 650                | 430              | 850               |                    |    |     |    |    |   |   | 200 | 325 |                     |
|     |               | 700                | 460              | 800               |                    |    |     |    |    |   |   | 225 | 350 |                     |
|     |               | 750                | 490              | 750               |                    |    |     |    |    |   |   | 250 | 375 |                     |
|     |               | 800                | 520              | 700               |                    |    |     |    |    |   |   | 275 | 400 |                     |
|     | 850           | 550                | 650              | 300               | 425                | 50 |     |    |    |   |   |     |     |                     |
|     | 900           | 600                | 600              | 325               | 450                |    |     |    |    |   |   |     |     |                     |
|     | 950           | 630                | 550              | 350               | 475                |    |     |    |    |   |   |     |     |                     |
|     | 1000          | 660                | 500              | 375               | 500                |    |     |    |    |   |   |     |     |                     |

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

| Typ | Bau-<br>größe | A  | B  | J  | G  | K  | F  | V1 | Gewicht<br>[kg/m] |
|-----|---------------|----|----|----|----|----|----|----|-------------------|
| HTT | 30            | 15 | 30 | 16 | 10 | 15 | M6 | M5 | 2,4               |