


Hegra Rail Datenblatt HTT070



Teilauszug

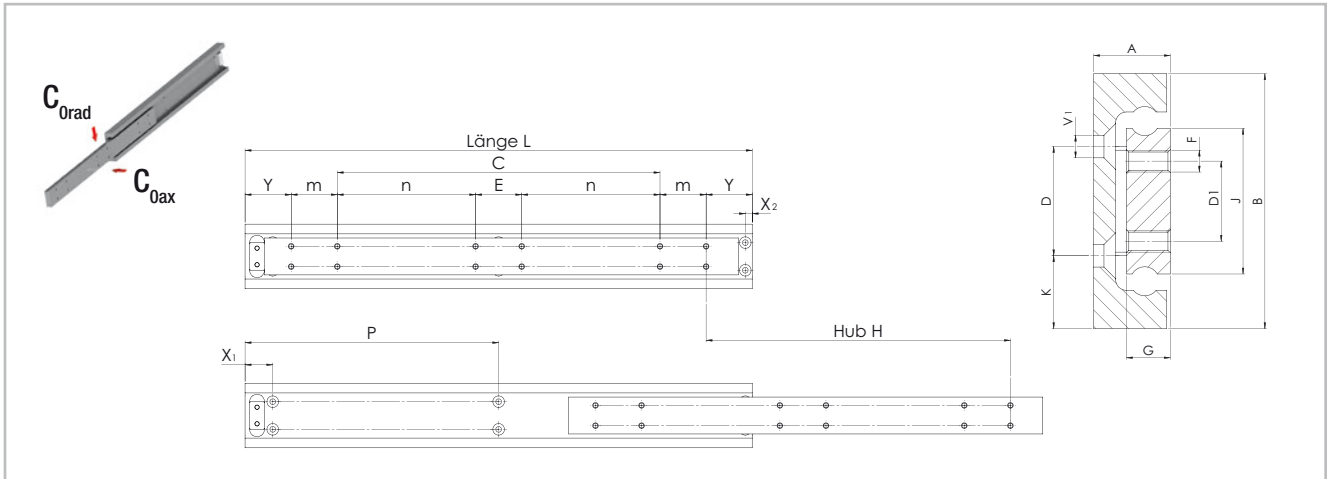

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen
				C_{Orad} [N]	C_{Oax} [N]									
HTT	70	500	300	4200	70 % C_{Orad}	30	7,5	50	50		50	300	250	8
		550	330	4150						150		275		
		600	360	4100						175		300		
		650	390	4050						200		325		
		700	420	4000						225		350		
		750	450	3900						250		375		
		800	480	3800						275		400		
		850	510	3700						300		425		
		900	540	3600						325		450		
		950	570	3450						350		475		
		1000	600	3300						375		500		
		1100	660	3100						425		550		
		1200	720	2900						475		600		
		1300	780	2700						525		650		
		1400	840	2400						575		700		
		1500	900	2100						625		750		
		1600	960	1800						675		800		
1700	1020	1500	725	850										

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	D1	F	V1	Gewicht [kg/m]
HTT	70	21,3	70	40	12	20	30	22	M6	M6	9,3