


Hegra Rail Datenblatt H2H080



Übersatzzug

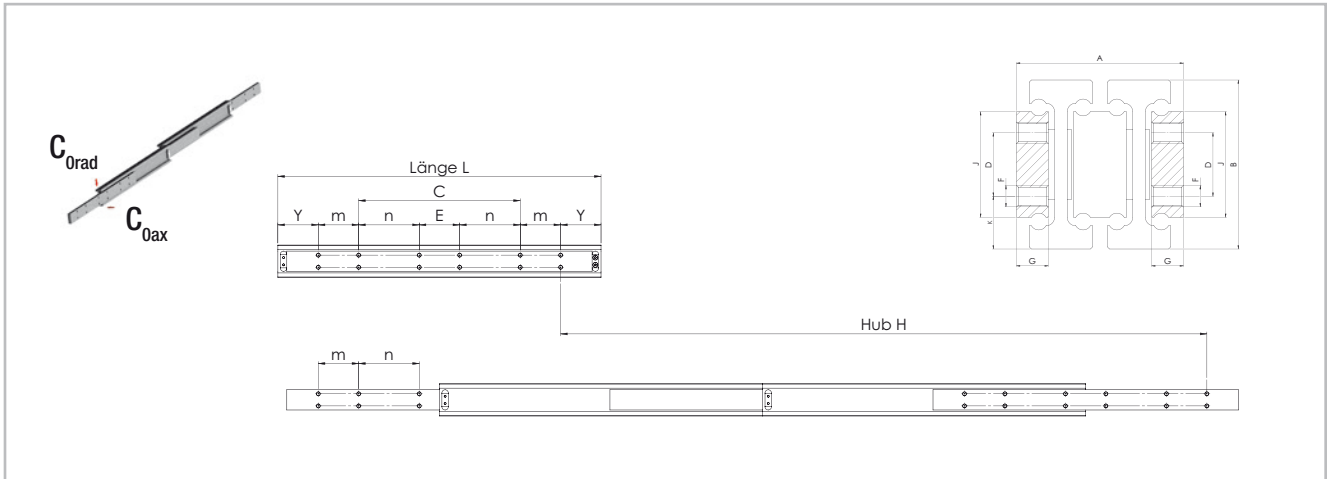

Alle Abmessungen sind in mm angegeben

| Typ | Bau- größe | Länge L [mm] | Hub H [mm] | Tragzahl pro Paar C _{Orad} [N] | Y | m | n | E | C | Anzahl Bohrungen | | | |
|-----|---------------|--------------------|------------------|--|-----|-----|---|---|-----|---------------------|-----|---|----|
| H2H | 80 | 500 | 1000 | 4850 | 100 | 100 | - | - | 100 | 8 | | | |
| | | 550 | 1100 | 5200 | | | | | 150 | | | | |
| | | 600 | 1200 | 5400 | | | | | 200 | | | | |
| | | 650 | 1300 | 5500 | | | | | 250 | | | | |
| | | 700 | 1400 | 5350 | | | | | 300 | | | | |
| | | 750 | 1500 | 5200 | | | | | 350 | | | | |
| | | 800 | 1600 | 5050 | | | | | 150 | | 100 | - | 12 |
| | | 850 | 1700 | 4850 | | | | | 175 | | | | |
| | 900 | 1800 | 4650 | 200 | | | | | | | | | |
| | 950 | 1900 | 4450 | 225 | | | | | | | | | |
| | 1000 | 2000 | 4250 | 250 | | | | | | | | | |
| | 1100 | 2200 | 3750 | 300 | | | | | | | | | |
| | 1200 | 2400 | 3250 | 350 | | | | | | | | | |
| | 1300 | 2600 | 3100 | 400 | | | | | | | | | |
| | 1400 | 2800 | 3000 | 450 | | | | | | | | | |
| | 1500 | 3000 | 2800 | 500 | | | | | | | | | |

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

| Typ | Bau- größe | A | B | J | G | K | D | F | Gewicht [kg/m] |
|-----|---------------|-------|----|----|----|----|----|-----|-------------------|
| H2H | 80 | 79+-1 | 80 | 50 | 15 | 25 | 30 | M10 | 34,80 |