


Hegra Rail Datenblatt H1D050



Übersauszug

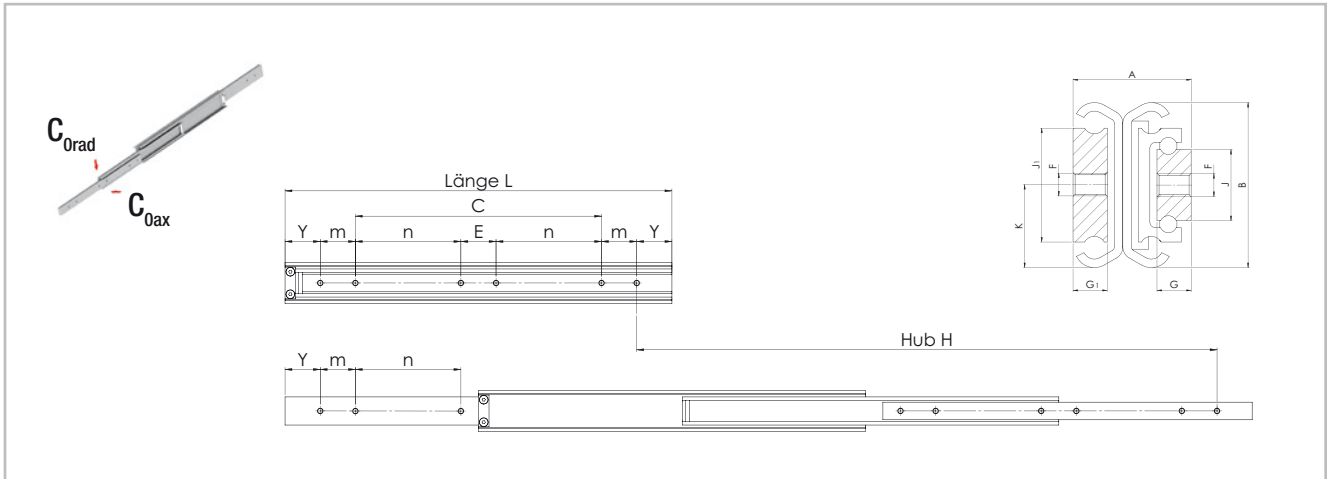

Alle Abmessungen sind in mm angegeben

| Typ | Bau- größe | Länge L [mm] | Hub H [mm] | Tragzahl pro Paar C_{0rad} [N] | Y | m | n | E | C | Anzahl Bohrungen |
|-----|---------------|--------------------|------------------|---|----|----|---|---|-----|---------------------|
| H1D | 50 | 250 | 375 | 600 | 50 | 50 | - | - | 50 | 4 |
| | | 300 | 450 | 650 | | | | | 100 | |
| | | 350 | 525 | 700 | | | | | 150 | |
| | | 400 | 600 | 750 | | | | | 200 | |
| | | 450 | 675 | 800 | | | | | 250 | |
| | | 500 | 750 | 750 | | | | | 300 | |
| | 550 | 825 | 720 | 150 | 50 | - | 6 | | | |
| | 600 | 900 | 690 | 175 | | | | | | |
| | 650 | 975 | 650 | 200 | | | | | | |
| | 700 | 1050 | 610 | 225 | | | | | | |
| | 750 | 1125 | 570 | 250 | | | | | | |
| | 800 | 1200 | 540 | 275 | | | | | | |
| | 850 | 1275 | 500 | 300 | | | | | | |
| | 900 | 1350 | 450 | 325 | | | | | | |
| | 950 | 1425 | 400 | 350 | | | | | | |
| | 1000 | 1500 | 350 | 375 | | | | | | |

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

| Typ | Bau- größe | A | B | J | J1 | G | G1 | K | F | Gewicht [kg/m] |
|-----|---------------|------|----|----|----|----|----|----|----|-------------------|
| H1D | 50 | 37,5 | 50 | 20 | 35 | 12 | 10 | 25 | M6 | 9,60 |