


Hegra Rail Datenblatt HVD050



Vollauszug

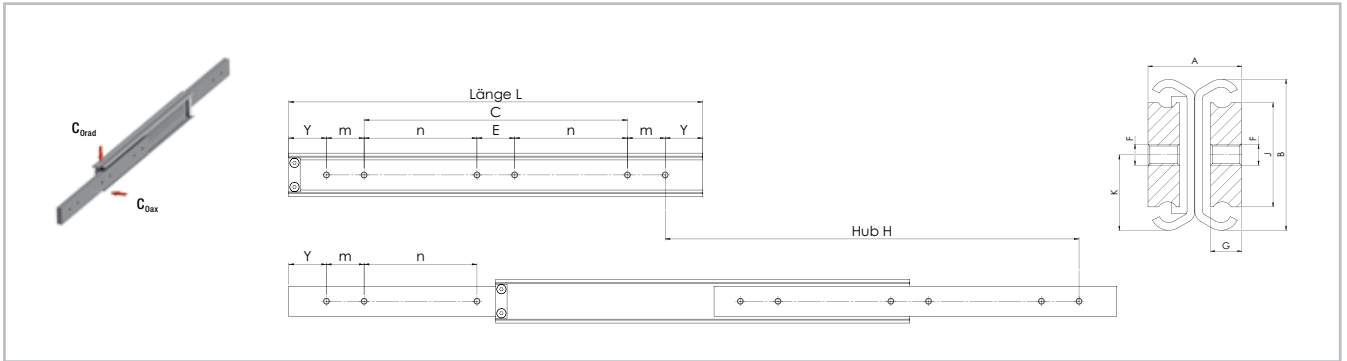

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		Y	m	n*	E*	C	Anzahl Bohrungen		
				C _{Orad} [N]	C _{Oax} [N]								
HVD	50	300	300	1800	50 % C _{Orad}	50	50			100	4		
		350	350	1850						150			
		400	400	1900						-		200	
		450	450	1850						250			
		500	500	1800						300			
		550	550	1750						150	50	-	6
		600	600	1700						175			
		650	650	1650						200			
		700	700	1600						225			
		750	750	1550						250			
		800	800	1500						275			
		850	850	1450						300			
		900	900	1400						325			
		950	950	1350						350			
		1000	1000	1300						375			
		1100	1100	1200						425			
		1200	1200	1100						475			
		1300	1300	1000						525			
		1400	1400	900						575			
		1500	1500	800						625			

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	Gewicht [kg/m]
HVD	50	31	50	35	10	25	M6	8,80