


Hegra Rail Datenblatt HVD058



Vollauszug

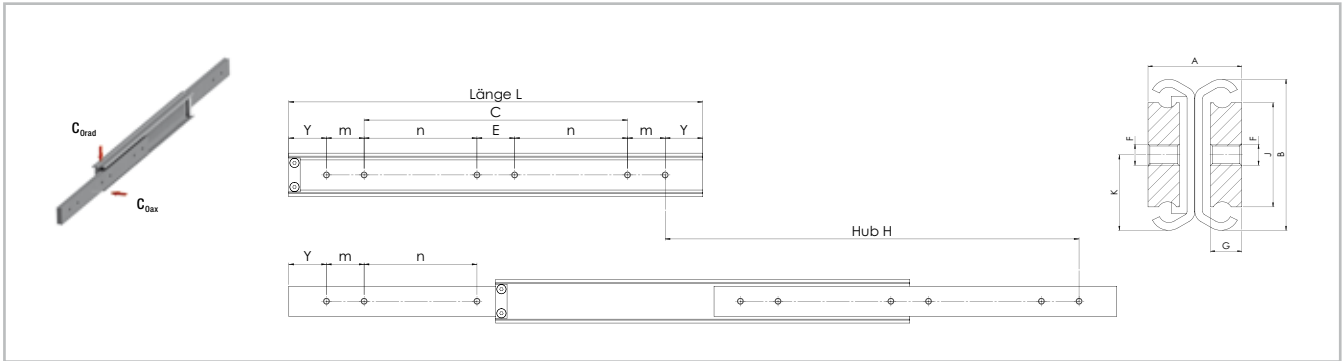

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		Y	m	n*	E*	C	Anzahl Bohrungen			
				C _{Orad} [N]	C _{Oax} [N]									
HVD	58	300	300	2400	50 % C _{Orad}	50	50			100	4			
		350	350	2450						150				
		400	400	2500						-		-	200	
		450	450	2450						250				
		500	500	2400						300				
		550	550	2350						150	50	-	-	6
		600	600	2300						175				
		650	650	2250						200				
		700	700	2200						225				
		750	750	2150						250				
		800	800	2100						275				
		850	850	2050						300				
		900	900	2000						325				
		950	950	1900						350				
		1000	1000	1850						375				
		1100	1100	1750						425				
		1200	1200	1650						475				
		1300	1300	1550						525				
		1400	1400	1450						575				
		1500	1500	1400						625				

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	Gewicht [kg/m]
HVD	58	36	58	40	12	29	M8	11,70