


# Hegra Rail Datenblatt HVC045



## Vollauszug

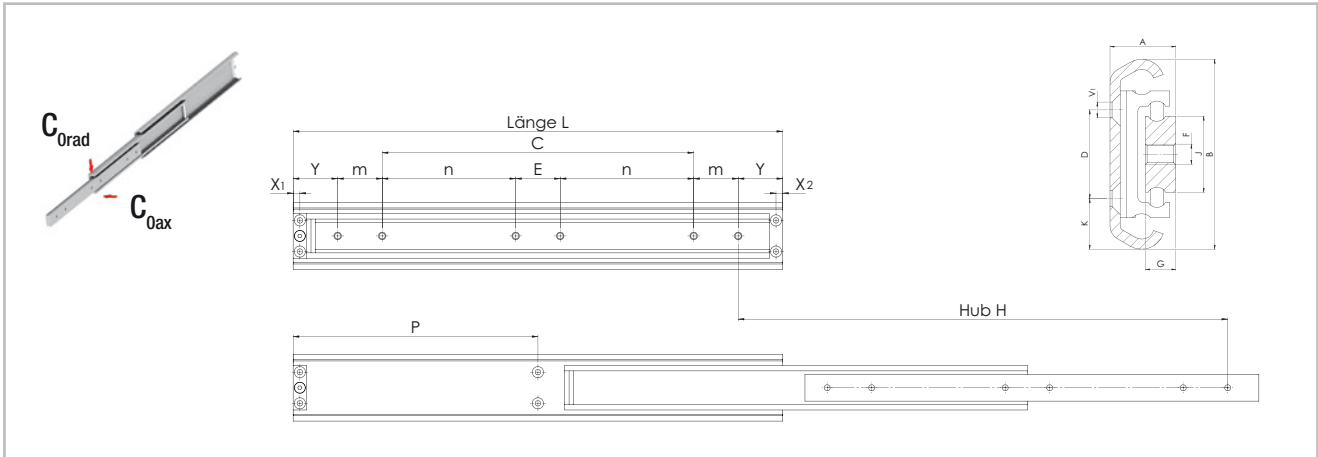

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	C	P	Anzahl Bohrungen
				$C_{Orad}$ [N]	$C_{Oax}$ [N]							
HVC	45	300	300	1150	50 % $C_{Orad}$	7,5	7,5	50	50	100	-	4
		350	350	1200						150		
		400	400	1200						200		
		450	450	1150						250		
		500	500	1150						300		
		550	550	1100						275		
		600	600	1050						300	6	
		650	650	1000						325		
		700	700	950						350		
		750	750	900						325		
		800	800	850						400		
		850	850	800						425		
		900	900	750						450		
		950	950	700						475		
		1000	1000	650						500		
		1100	1100	500						50		
		1200	1200	400						600		

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HVC	45	20,5	45	16	10	11,5	22	M6	M5	4,00