


# Hegra Rail Datenblatt LTH30 KF



## Schwerlastauszug

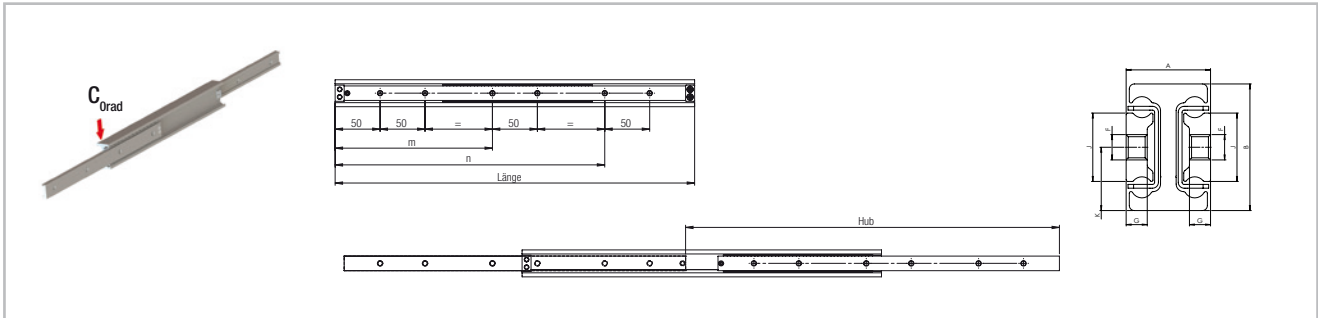

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		m [mm]	n [mm]	Anzahl Bohrungen
				C <sub>Orad</sub> [N]	C <sub>Oax</sub> [N]			
LTH	30	250	285	404	a. A.	-	150	4
		300	323	1008			200	
		350	377	1042			250	
		400	416	1136			300	
		450	485	1164		350	6	
		500	523	1470		400		
		550	577	1464		450		
		600	615	1402		500		
		650	685	1230		550		
		700	723	1186		600		
		750	777	1100		650		
		800	815	1066		700		
		850	884	962		750		
		900	923	936		800		
		950	977	882		850		
		1000	1015	858		900		
		1050	1084	792		950		
		1100	1123	772		1000		
1150	1176	736	1050					
1200	1215	720	1100					

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	Gewicht [kg/m]
LTH	30	20	30	16,2	5,0	15,0	M6	3,5