


Hegra Rail Datenblatt LTH45 RF



Schwerlastauszug

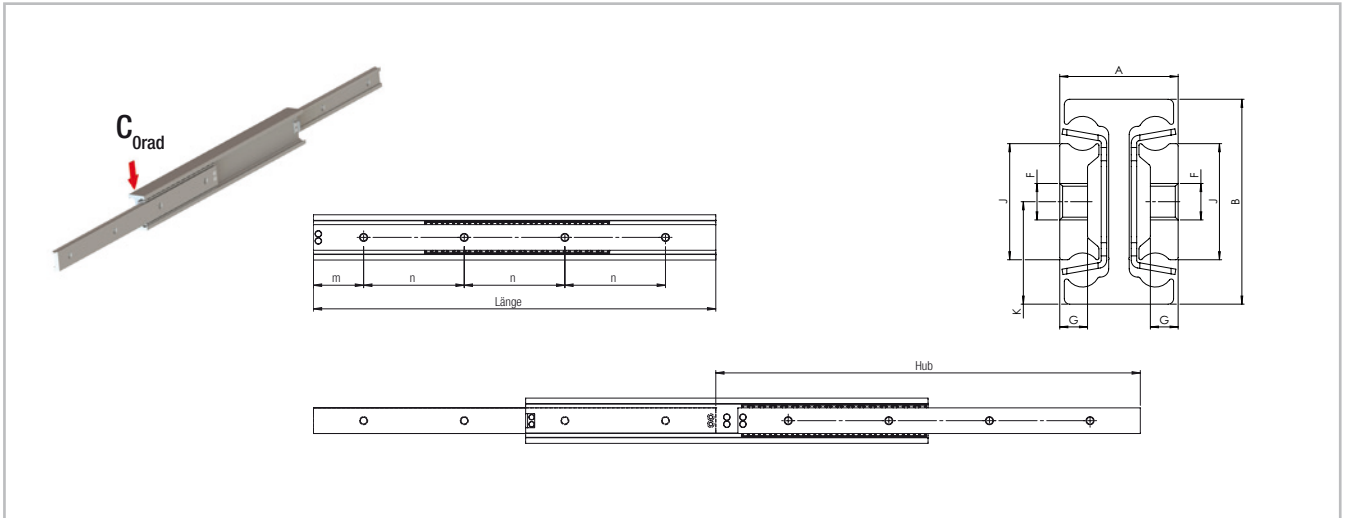

Alle Abmessungen sind in mm angegeben

Hegra Rail Datenblatt LTH45 RF



Schwerlastauszug

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		m [mm]	n [mm]	Anzahl Bohrungen
				C _{Orad} [N]	C _{Oax} [N]			
LTH	45	250	276	2610	a. A.	25	100	3
		300	310	2824		50		
		350	388	2820		25		4
		400	422	2842		50		
		450	478	2864		25		5
		500	512	2900		50		
		550	590	2764		25		6
		600	624	3032		50		
		650	680	3252		25		7
		700	714	3346		50		
		750	770	3084		25		8
		800	826	2860		50		
		850	882	2666		25		9
		900	916	2614		50		
		950	972	2450		25		10
		1000	1028	2306		50		
		1050	1084	2178		25		11
		1100	1118	2144		50		
		1150	1174	2034		25		12
		1200	1230	1934		50		
1250	1286	1842	25	13				
1300	1320	1818	50					
1350	1376	1738	25	14				
1400	1410	1716	50					
1450	1488	1596	25	15				
1500	1522	1578	50					

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	F	Gewicht [kg/m]
LTH	45	26	45	25,5	6,1	22,5	M8	6,0