


Hegra Rail Datenblatt HTC045



Teilauszug

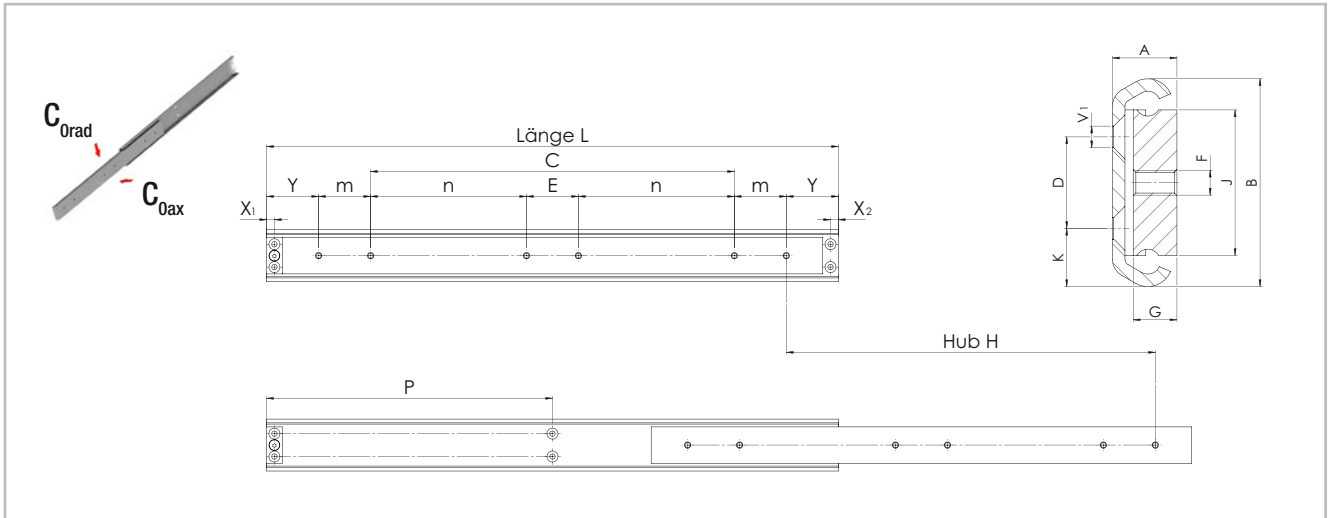

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n	E	C	P	Anzahl Bohrungen		
				C_{0rad} [N]	C_{0ax} [N]											
HTC	45	300	180	1250	60% C_{0rad}	7,5	7,5	50	50	-	-	100	150	4		
		350	230	1300								150	175			
		400	260	1250								200	200			
		450	310	1200								250	225			
		500	340	1150								300	250	50	-	-
		550	370	1100								150	275			
		600	400	1050								175	300			
		650	430	1000								200	325			
		700	460	950								225	350			
		750	490	900								250	375			
		800	520	850								275	400			
		850	550	800								300	425			
		900	600	750								325	450			
		950	630	700								350	475			
		1000	660	650								375	500			
		1100	720	550								425	550			
1200	800	450	475	600												

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HTC	45	15,5	45	30	10	11,5	22	M6	M6	3,80