


# Hegra Rail Datenblatt HVC075



## Vollauszug

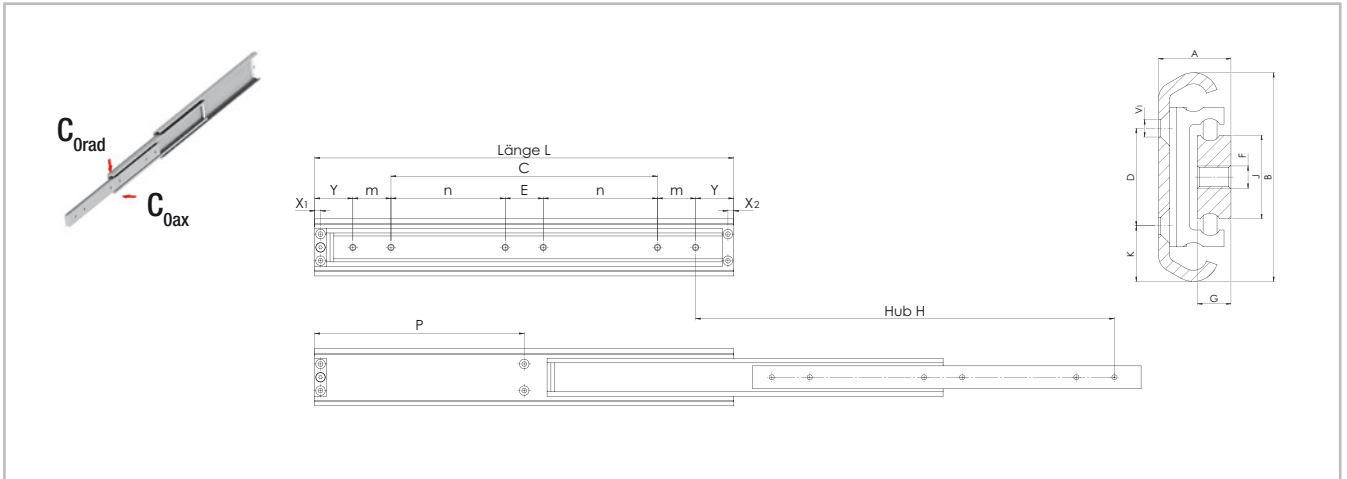

Alle Abmessungen sind in mm angegeben

# Hegra Rail Datenblatt HVC075



## Vollauszug

Typ	Bau- größe	Länge	Hub	Tragzahl pro Paar		X1	X2	Y	m	n*	E*	C	P	Anzahl Bohrungen									
		L [mm]	H [mm]	C <sub>0rad</sub> [N]	C <sub>0ax</sub> [N]																		
HVC	75	300	300	3200	50 % C <sub>0rad</sub>	7,5	7,5	50	50	-	-	100	-	4									
		350	350	3250								150											
		400	400	3300								200											
		450	450	3250								250											
				500								500	3200							300			
				550								550	3150					150				275	6
				600								600	3100					175				300	
				650								650	3050					200				325	
				700								700	3000					225				350	
				750								750	2950					250				325	
				800								800	2900					275				400	
				850								850	2850					300				425	
				900								900	2800					325				450	
				950								950	2750					350				475	
				1000								1000	2700					375	50	-		500	
				1100								1100	2600					425				550	
				1200								1200	2500					475				600	
				1300								1300	2350					525				650	
				1400								1400	2200					575				700	
				1500								1500	2050					625				750	
		1600	1600	1900					675				800										
		1700	1700	1750					725				50										
		1800	1800	1600					775				900										
		1900	1900	1450					825				950										
		2000	2000	1300					875				1000										

Die Tragzahlen betragen bei Aluminium 40 % und bei Edelstahl 60 % der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HVC	75	26	75	30	12	20	35	M8	M6	9,30