


Hegra Rail Datenblatt HVT080



Vollauszug

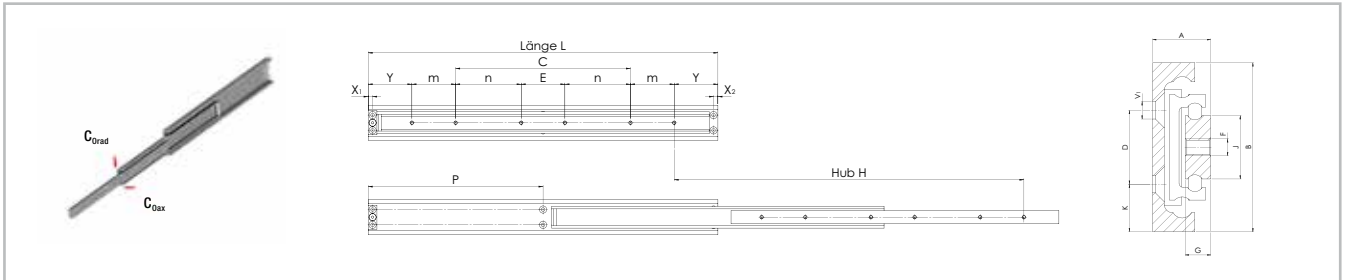

Alle Abmessungen sind in mm angegeben

Typ	Bau- größe	Länge L [mm]	Hub H [mm]	Tragzahl pro Paar		X1	X2	Y	m	n*	E	C	P	Anzahl Bohrungen	
				C _{Orad} [N]	C _{Oax} [N]										
HVT	80	500	500	4250	50 % C _{Orad}	10	10	100	100			100		4	
		550	550	4300								150			
		600	600	4350								200			
		650	650	4350								250			
		700	700	4350								300			
		750	750	4300								350			
		800	800	4250								150		400	6
		850	850	4200								175		425	
		900	900	4100								200		450	
		950	950	4000								225		475	
		1000	1000	3900								250		500	
		1100	1100	3700								300		550	
		1200	1200	3500								350		600	
		1300	1300	3250								400		650	
		1400	1400	3000								450		700	
		1500	1500	2700								500		750	
		1600	1600	2400								550		800	
		1700	1700	2150								600		850	
		1800	1800	1900								650		900	
		1900	1900	1650								700		950	
2000	2000	1400	750	1000											

Die Tragzahlen betragen bei Aluminium 40% und bei Edelstahl 60% der angegebenen Werte, falls in dieser Materialvariante verfügbar.

Typ	Bau- größe	A	B	J	G	K	D	F	V1	Gewicht [kg/m]
HVT	80	27,5	80	30	12	12,5	35	M8	M8	11,40